

T H E R H I N O D O R

RHINO ALUMINIUM



C O N T E N T S

ntroduction 3	
Features5	
Options & Finishes 7	
Styles 9	
Colour & Handle Options13	
Keyless Entry15	
Winkhaus AV3 Locking System17	
Yale 3 Star Cylinder19	
Enquiries21	



With a wide choice of flush and glazed in door slabs, the Decalu88 Entrance Door is defined by contemporary sightlines and sophisticated styling.

It also delivers exceptional through-life performance with a maximum bowing tolerance of only 2.5mm under heat stress. This means it won't bow or stick, regardless of the temperature outside, removing limitations on door design, including the specification of dark colours on south facing elevations.

Our entrance doors bring many benefits including aesthetics, security, functionality, and performance. Engineered to the highest industry standards, Rhino Aluminium offer a wide array of design options; from the sleek and subtle, to superior and grand contemporary designs.

Our entrance doors bring many benefits including aesthetics, security, functionality, and performance. Engineered to the highest industry standards, Rhino Aluminium offer a wide array of design options; from the sleek and subtle, to superior and grand contemporary designs.

BASIC PRINCIPLES

- Stong & durable finish
- Solid & secure
- Contemporary designs
- Flush finish with minimal gasket sightline
- Concealed drainage

DESIGN FEATURES

- ULTRA SECURE NON BEADED, STRUCTURALLY BONDED PANEL

59MM PANEL DEPTH

- LAMINATED SAFETY GLASS - 50MM TRIPLE GLAZED

- ARGON GAS

- STIRLING STAINLESS BAR HANDLES

WINKHAUS AV3 AUTO LOCKING WITH KEY OPERATION

- YALE ANTI BUMP KEY CYLINDER WITH INTERNAL THUMB TURN OPTION

- DR HAHN ROLLENBAND AT 2-PART SECURITY HINGE SYSTEM & HINGE HORNS

THERMALLY BROKEN ALUMINIUM PROFILE SYSTEM THROUGHOUT

- GROOVED & TAILED FINISH OPTIONS



OPTIONS & FINISHES


We offer a wide range of designs, colours and additional features; such as curved handles, finger point entry, and unique & bespoke colour designs.



GLASS OPTIONS

All of our glazing is triple glazed as standard, but we offer 2 different glass options to best suit your entrance.

- OUR OBSCURED OPTION AVAILABLE IS A SATIN FINISH ALSO KNOWN AS SAND BLAST,
 WHICH GIVES 100% PRIVACY, YET ALLOWS PLENTY OF LIGHT TO PASS THROUGH
- OUR FULLY TRANSPARENT PANELS ARE UNCOLOURED AND UNTINTED

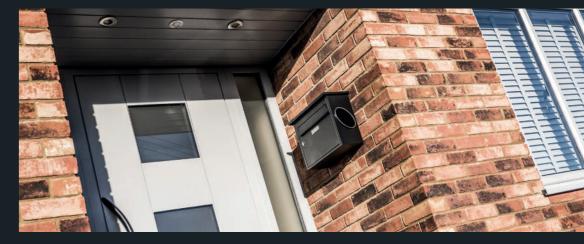





THE TAILED FINISH

Using precise craftsmanship, this feature is unique to Rhino Aluminium, and really does enhance the grand appearance of a property entrance.

BORNEO

NAKURU



KULON GROOVED

KULON











ANGOLA



SPECIFICATIONS & TECHNOLOGY

THE RHINO ENTRANCE DOOR

The Rhino Entrance Door is a modern and contemporary take on the standard front door. With our unique thermal break design, high levels of thermal and acoustic insulation and a low threshold option to comply with Part M regulations, our doors improve thermal performance and will satisfy most architectural requirements. Dimension options up to 1200mm in width and 2400mm in height, and a full range of customisable hardware is available.



DESIGN FEATURES

- Slim outer frame
- Flush Finished Frame
- Automatic Multi-Point Locking
- Width option upto 1200mm and height upto 2400mm
- Key operation locking system

OPTIONS

- AV3 Autolock Mechanical Operation
- Low Threshold Option
- 12 Contemporary Styles and Designs
- Various Textured Finish Colour Options
- eKey Entry Available
- Stainless Steel Hardware
- Detail finishes
- Range of Configurations

SPECIFICATIONS

Performance and accreditation			
Uw-Value (Triple Glazing)	1.0 W/m² K - Part L & Future Homes ready		
Air Permeability	NBN EN12207 (Class 4)		
Water Tightness	NBN EN12208 (450 Pa)		
Wind Resistance	NBN EN12210 (Class C4)		
Security	Kitemarked PAS24		

_	~	_				


Max Sash Weight	150 Kg
Max Sash Dimension	1200mm (w) 2400mm (h)


System Features


Dual Colour Option	√
Multi-point Locking	√
Glazing Options	50mm Triple Glazed

CAD CROSS SECTIONS

Thermal breaks shown in rec









CONFIGURATIONS

The diagrams shown here illustrate some of the configurations achievable with the Rhino door.







KEY







1) Fixed Panel 2) Hinged Right 3) Hinged Left

deceuninck















Should your entrance require a colour alternative to our standard three, below are some more options available at an additional cost. Non-standard colours can add up to 4 weeks to the production time. Further textured RAL colours may be available on request, please contact us for more information.

PURE WHITE	GREY ALUMINIUM	YELLOW GREY	MOSS GREEN	WINE RED
RAL 9010	RAL 9007	RAL 7034	RAL 6005	RAL 3005
TRAFFIC WHITE	DUSTY GREY	GREY BEIGE	FIR GREEN	PURPLE RED
RAL 9016	RAL 7037	RAL 1019	RAL 6009	RAL 3004
CREAM	WHITE ALUMINIUM	LIGHT IVORY	OLIVE GREEN	GENTIAN BLUE
RAL 9001	RAL 9006	RAL 1015	RAL 6003	RAL 5010
OYSTER WHITE	SILK GREY	QUARTZ GREY	SEPIA BROWN	GRAPHITE GREY
RAL 1013	RAL 7044	RAL 7039	RAL 8014	RAL 7024
LIGHT GREY	PEBBLE GREY	PALE GREEN	UMBRA GREY	BLACK GREY
RAL 7035	RAL 7032	RAL 6021	RAL 7022	RAL 7021

Rhino Aluminium offer four types of handle, as detailed. These are high quality brushed stainless steel, providing a sublime finish to the doors.

FLAT BAR HANDLE
FLAT CURVED BAR HANDLE
ROUND INLINE BAR HANDLE
BOW HANDLE

- THE BAR HANDLE LENGTHS ARE AVAILABLE IN 1000MM, 1200MM & 1600MM
- BOW HANDLE LENGTH 585MM

S

Brushed stainless steel cylinder escutcheons matched to exterior handle and internal lever handles come as standard with any Rhino Door.







State-of-the-art access solutions are a fundamental feature of advanced building concepts, and the first impression counts. The RHINO door can be fitted with optional keyless entry from Europe's premier keyless entry provider ekey.

Made in Austria, all ekey products undergo a rigorous endurance test before they reach the market. The test involves intensive simulations of blazing heat, biting cold, and high humidity, and every finger scanner is subjected to these conditions, along with all of its components, countless times before reaching the customer.

- THE MOST SECURE, MOST CONVENIENT WAY OF ENTERING A HOUSE
- EXTENSIVE PRODUCTION, MANUFACTURING, AND FUNCTIONAL TESTING (ZERO TOLERANCE)
- TESTING FOR ENVIRONMENTAL AND TEMPERATURE RESISTANCE
- VIBRATION AND SHOCK-TESTED

 $\overline{}$

~

S

S

Z

 \rightarrow

7

- TESTED FOR PENETRATION OF WATER AND MECHANICAL PARTS
- QUALITY MANAGEMENT SYSTEM IN ACCORDANCE WITH EN ISO 9001:2008
- CAN STORE UP TO 99 FINGERPRINTS OR CODES
- CAN BE USED TO CONTROL FROM 1 TO 3 FUNCTIONS (E.G. DOOR, GATE AND ALARM SYSTEM)
- OPERATE BY USING THE EKEY HOME APP (EKEY FINGER SCANNER INTEGRA BLUETOOTH)
- OPTIONAL CARD ACCESS (RFID)



INTEGRA

MOUN

For cavity wall or outlet mounting and integration into doors.



The model to suit any requirement.



The ekey codepad serves as an alternative to the fingerprint scanner.





AV3 LOCKING SYSTEM

With over 160 years experience in producing locking systems for the world market, Winkhaus is a market leader. Producing innovative security solutions to meet the challenges of tomorrows rapidly changing security and ease of use requirements.

Superbly engineered and manufactured in Germany the AV3+ Locking system is approved by the Police 'Secured by Design' security initiative. This important independent endorsement is an essential requirement of the Association of British insurers.

- DUAL HOOK FOR ADDED SECURITY & DYNAMIC CONTACT PRESSURE
 - SMOOTH OPERATION WITH A TIGHT SEAL
- MAGNETIC TRIGGER IN COMBINATION WITH SAFETY PIN MINIMISES SCRATCHING
 - FAIL-SAFE FUNCTION PREVENTS HOOKS FROM FALLING OUT
 - HOLIDAY LOCKOUT FUNCTION FOR IMPROVED SECURITY
 - APPROVED ACCORDING TO VDS CLASS B
 - AS 3-POINT LOCKING SYSTEM RC2 COMPATIBLE TO DIN EN1627-30



RHINO ALUMINIU



The Yale Platinum 3 Star Euro Profile cylinder is a TS007 3 star Kitemarked Anti-Snap security product to provide maximum security against known cylinder attack methods.

> The Platinum 3 Star cylinder is independently tested by BSI to be awarded the British Kitemarked TS007:2014 3 star accreditation.

ယ

S

~

Z

7

TS007 2014 3 STAR APPROVED

KM559658

BSEN1303:2005 APPROVED

- ANTI-SNAP, SACRIFICIAL FRONT SECTION

- ANTI-PICK, ANTI-BUMP, ANTI-SCREW, ANTI-PULL AND ANTI-DRILL EURO RETROFIT CYLINDER



ANTI-SNAP

A small section of the cylinder is sacrificed under attack, leaving the remainder of the cylinder intact, and your door safely locked __

ANTI-BUMP

Specialised side pins provide bump resistance ____

HORIZONTAL KEYWAY

Unique multi shear-line

technology designed to resist

lock picking and bumping

With reversible flat key for easy key entry

CERTIFIED

Approved to TS007:2014 3 star - the highest certifiable

INNER STRENGTH

The dedicated central bridge delivers unparalleled inner strength to the cylinder providing protection even if the cylinder is attacked from the outside

ANTI-DRILL

Hardened steel protection incorporated within the cylinder provides heavy resistance against drill attacks



ANTI-PICK







E N Q U I R I E S

01843 44 66 79 | info@rhinoaluminium.co.uk | www.rhinoaluminium.co.uk |

