

bre

**Weathertightness test to
BS 6375: Part 1: 2009 on
a Beaufort Secure
Design Ltd open
outward, Bi-folding/
sliding door with
standard threshold**

Prepared for: Mr. Dale Pegler


Beaufort Secure Design Ltd

26 August 2009

Test report number 254786



0578

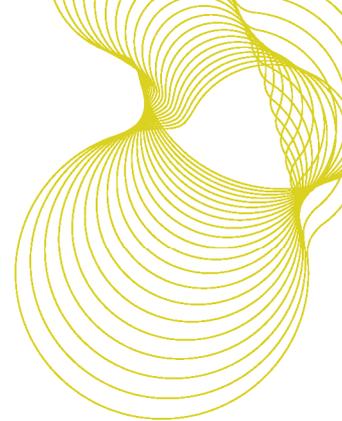

Tested on behalf of BRE by

Name Malcolm Pound
Position Laboratory Manager and Senior Consultant, Actions, Building Technology
Date 13 July 2009

Signature *M. C. Pound*

Prepared on behalf of BRE by

Name Malcolm Pound
Position Laboratory Manager and Senior Consultant, Actions, Building Technology
Date 26 August 2009

Signature *M. C. Pound*

Approved on behalf of BRE

Name Dr. P. Blackmore
Position Associate Director of Actions, Building Technology
Date 27 August 2009

Signature *P. Blackmore*

BRE
Garston
WD25 9XX
T + 44 (0) 1923 664000
F + 44 (0) 1923 664010
E enquiries@bre.co.uk
www.bre.co.uk


BRE is not UKAS accredited to make opinions and interpretation. Any opinions and interpretations included as part of this report are clearly marked as such.



0578

This report may only be distributed in its entirety and in accordance with the terms and conditions of the contract. Test results relate only to the items tested. BRE has no responsibility for the design, materials, workmanship or performance of the product or items tested. This report does not constitute an approval, certification or endorsement of the product tested.

This report is made on behalf of BRE. By receiving the report and action on it, the client – or any third party relying on it – accepts that no individual is personally liable in contract, tort or breach of statutory duty (including negligence).

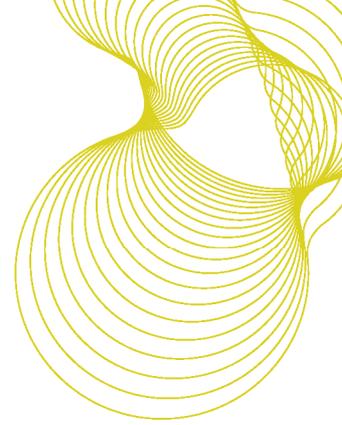

1 Introduction

At the request of Mr. D. Pegler of Beaufort Secure Design Ltd, 25 Queenway Meadows, Newport, Gwent, NP19 4SQ, BRE issued proposal number 125191 on 30 June 2009. The proposal was accepted on 30 June and BRE tested a specimen door on 13 July 2009.


The tests to methods in BS 6375: Part 1: 2009, BS EN 1026¹, 1027² and 12211³ measure the weathertightness of the specimen in terms of air permeability, watertightness and resistance to wind load respectively. Classification of the results is based on BS 6375: Part 1: 2009⁴ and BS EN 12207⁵, 12208⁶, 12210⁷.

The tests on the specimen were carried out under the BRE Standard Terms and Conditions of Business for testing and to the UKAS BRE Specific Procedures Series F, as BRE Job number 254786 in project number CV3157.

The tests were witnessed by:

Mr. D. Pegler Beaufort Secure Design Ltd

Mr. H. John Beaufort Secure Design Ltd

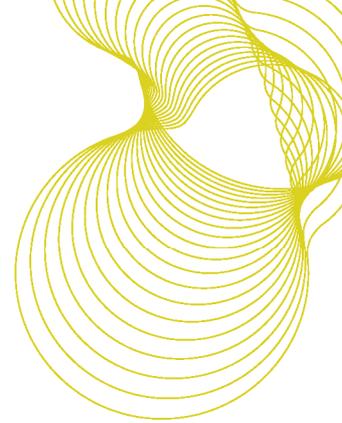

2 Details of tests carried out

BS 6375: Part 1: 2009 specifies that the air permeability test is performed under both positive and negative test pressures and that the average of the measurements defines the results. It also specifies that water tightness test method A is used and that deflections measured during the resistance to wind load test do not exceed 1/150 of the span. The weathertightness test comprised of three parts in the sequence:

1. Air permeability to BS EN 1026: 2000; by application of a series of test air pressure differentials across the specimen with measurement of the air permeability of it at each pressure step. The maximum positive and negative pressure differential was 600 Pa reached in pressure steps of 50, 100, 150, 200, 250, 300, 450 and 600 Pa.
2. Watertightness to BS EN 1027: 2000; by applying specified amounts of water spray to the outside face of the specimen while incrementally increasing the air pressure differential across it. The test pressure, time and position of any water penetration are recorded. The maximum positive air pressure differential was 900 Pa. Pressure (Pa)/time (min) steps were 0/15, 50/5, 100/5, 150/5, 200/5, 250/5, 300/5, 450/5 and 600/5.
3. Resistance to wind load to BS EN 12211: 2000; by application of a series of positive and negative test air pressures. Measurements and inspections are made to assess relative frontal deflection and resistance to damage from wind loads.

The resistance to wind load test includes a deflection test, a repeated pressure test and operational test, an air permeability test and finally a safety test. For the purpose of the resistance to wind load test three test pressures are defined:

P1 applied to measure the deflections of parts of the test specimen.


P2 50 cycles of pulsating pressure to assess performance under repeated wind loads.

P3 applied to assess the safety of the test specimen under extreme conditions.

The values of P1, P2 and P3 are related as follows: $P2 = 0.5P1$, $P3 = 1.5P1$.

For these tests the values are: $P1 = 2400$ Pa, $P2 = 1200$ Pa and $P3 = 3600$ Pa.

Note: The repeat air permeability test is an integral part of the resistance to wind load test and its significance is as an indicator of damage that may occur during that test.

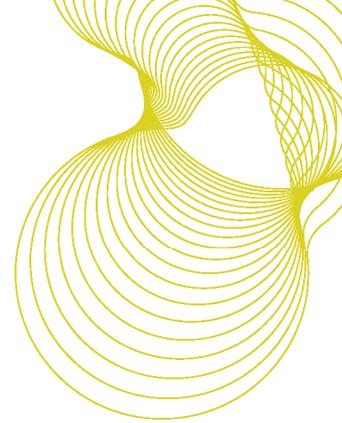

3 Classification of results

BS 6375: Part 1: 2009 classifies the results for products in the UK. For a door to be included in an exposure category the appropriate test pressures for air permeability, watertightness and resistance to wind shall be attained or exceeded. The relevant product standard BS EN 14351-1:2006⁸ also states that classification of air permeability is based on the averages of the positive and negative air leakage values at each pressure step.

The specimen was tested to a UK exposure category of 2000+ (2400 Pa). The classifications set in BS 6375: Part 1: 2009 for a UK exposure category of 2000+ for windows are: Air permeability at Class 2/300 Pa or Classes 3 and 4 when tested to 600 Pa, watertightness at Class 7A/300 Pa and resistance to wind load at Class AE at P1 2400 Pa, P2 1200 Pa and P3 3600 Pa.

For Air permeability Clause 4.6 of BS EN 12207 explains the relationship between classifications based on air leakage over the overall area and the length of the opening joint. When this results in adjacent classes (as is the case in these tests) then the most favourable class with lower rate is given.


The BS EN classifications are explained below:

Air permeability: BS EN 12207: 1999. The classification is based on a comparison of the air permeability of the test specimen related to both overall area and length of opening joint. There are four classes; Class 4 is applicable to the most airtight specimens while Class 1 describes those with most air leakage. To meet any class the measured air permeability of the specimen must not exceed the upper limit at any test pressure step in that class.

Watertightness: BS EN 12208: 2000. The classification is based on a comparison of the watertightness of the test specimen related to test pressures and duration of the test. There are nine classes; 1A/1B up to 9A for test pressures from 0 Pa to 600 Pa. For specimens that remain watertight over 600 Pa for 5 minutes a class Exxx is used. The xxx is the maximum test pressure e.g. 750 Pa. To meet any class the specimen must remain watertight for 5 minutes up to and at the test pressure set for that class.

Resistance to wind load: BS EN 12210: 1999. The classification is based on a comparison of the resistance to wind loads of the test specimen when subjected to test pressures P1, P2 and P3. There are five classes; 1 up to 5 for P1 test pressures from 400 Pa to 2000 Pa. For specimens that are tested to P1 pressures exceeding 2000 Pa a class Exxxx is used. The xxxx is the actual test pressure P1 used e.g. 2400 Pa. To achieve any class the resistance of the specimen to wind load must meet all the requirements for that class.


Note: This report has results for air permeability under positive and negative test pressures and a graph showing the average air permeability for them at each pressure step.

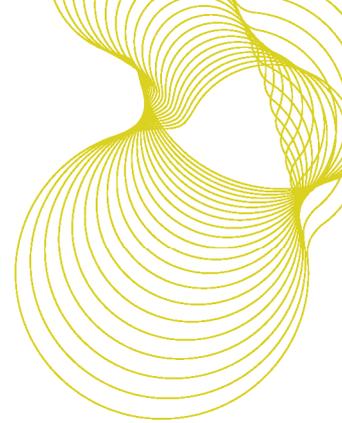

4 Test specimen

The general details about the test specimen supplied by Beaufort Secure Design Ltd for these tests are given below and in drawings in the Annex of this report.

- Type:** Aluminium frame members with three outward opening glazed door leaves arranged as a bi-folding and sliding unit. Reference: Beaufort Secure Design Ltd 2100 mm high x 3000 mm wide Folding Sliding door.
- Glazing:** All of the door leaves are internally glazed with 4 mm thick clear toughened glass Both of the lights are internally glazed with insulating glass units with 4 mm thick toughened glass and a 20 mm air gap. Snap-in aluminium beads retain the glazing seals and the glazing.
- Seals:** Around the door frame indoor edge there is an 8 mm thick brush pile type seal with central plastic fin. Bottom and top of the door frame has a weatherseal that engages with a similar one on the door leaves. The two folding joints have weatherseals front and back of the joint as do the opening joints at the right and left hand ends of the door. The top and bottom of the door leaves have a single row of seal near the outdoor face.
- All fixing holes have plastic caps fitted.
- Hardware:** At the right hand stile on the right hand door leaf one handle operates two claw bolts a central bolt and a latch. The key below this handle locks these bolts. On the left hand stile of the middle leaf a recessed handle (spring loaded) operates shoot bolts to the top and bottom of that stile. There are three hinges at each left hand stile on the three door leaves.
- Fixings:** For these tests the specimen was fixed and sealed into a wood surround frame with screws at the top, bottom and sides.
- Drainage:** Four slots with plastic hoods in the outdoor face of the threshold and five slots in the channel in the threshold under the closed door leaves. One cut-away connecting front and back channels in the threshold.
- Dimensions:** 2100 mm high x 3000 mm wide (overall). Area: 6.30 m²
Length of opening joint = 13.68 m

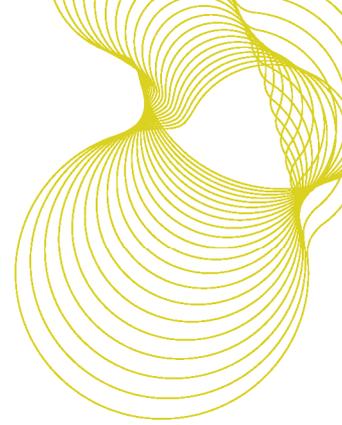

5 Test rig and preparatory procedures


The test specimen was conditioned for at least 4 hours within temperature and humidity ranges specified in the test standards of 10°C to 30°C and 25% to 75% RH respectively.

The water temperature in the watertightness test was within the specified range of 4°C to 30°C.

The door was mounted in the BRE test rig 'G', to form one wall of a pressure box, with the outdoor face of the door enclosed in the box.

A single spray bar with seven full circular cone nozzles was mounted in the pressure box to apply water to the outside face of the specimen at the rate of 2 L/min per nozzle in accordance with BS EN 1027 spraying method 1A.

Transducers were mounted on independent supports to measure deflections of a frame member retaining an insulating glass unit. Deflections were measured on the span at the positions indicated in Figure 1.

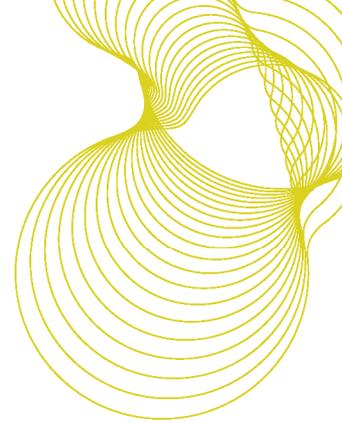


6 Summary of test results

The test results are summarised in Table 1 below for a UK exposure category of 2000+. Figures show detail of the door and detailed results are given in Annex 1.

BS or BS EN	Air permeability		Watertightness		Resistance to wind loads	
	Requirements	Results	Requirement	Results	Requirements	Results
BS 6375	Class 3 or 4 to 600 Pa	Met* the requirements of Class 4 based on the averages of readings in positive and negative tests	Class 7A at 300 Pa	Met & exceeded the require – ments. Class 9A at 600 Pa	Class AE2400 P1 = 2400 Pa P2 = 1200 Pa P3 = 3600 Pa	All met. Class AE2400

*considering Clause 4.6 of BSEN12207

Table 1. Summary of weathertightness test results

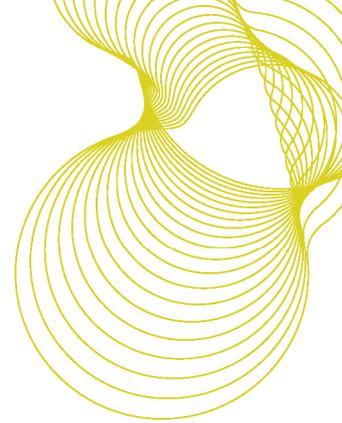


7 Conclusions

When the specimen Beaufort Secure Design Ltd 2100 mm x 3000 mm open outward Bi-folding/sliding door with standard threshold was tested to the standards described herein it was found to be:

- When considering Clause 4.6 of BS EN 12207 sufficiently airtight to attain Class 4 air permeability when the averages of the readings under positive and negative test pressures were considered, thus **meeting** the BS 6375: Part 1: 2009 requirements.
- Resistant to water penetration using method 1A to Class 9A up to and at 600 Pa thus **meeting and exceeding** the BS 6375: Part 1: 2009 requirements.
- Resistant to wind loads of ± 2400 Pa causing deflections less than 1/150 of the span of a door stile. Resistant to repeated pressure cycles of ± 1200 Pa and able to sustain the corresponding safety test pressure of ± 3600 Pa. The overall classification for resistance to wind load is Class AE2400 **meets** the requirements of BS 6375: Part 1: 2009.

8 References

1. BS EN 1026: 2000. Windows and doors – Air permeability – Test method. British Standards Institution, London.
2. BS EN 1027: 2000. Windows and doors – Watertightness – Test method. British Standards Institution, London.
3. BS EN 12211: 2000. Windows and doors – Resistance to wind load – Test method. British Standards Institution, London.
4. BS 6375: Part 1: 2009. Performance of windows and doors – Classification for weathertightness and guidance on selection and specification
5. BS EN 12207: 2000. Windows and doors – Air permeability - Classification. British Standards Institution, London.
6. BS EN 12208: 2000. Windows and doors – Watertightness - Classification. British Standards Institution, London.
7. BS EN 12210: 2000. Windows and doors – Resistance to wind load - Classification. British Standards Institution, London.
8. BS EN 14351-1:2006 Windows and doors – Product standard. British Standards Institution, London

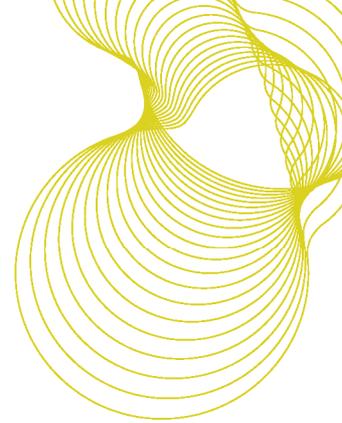

ANNEX 1. Weathertightness test results

positive pressure differential Pa	Air flow through the specimen m ³ /h	Air flow per unit area of the specimen m ³ /h.m ²	Air flow per metre of opening joint m ³ /h.m
50	9.73	1.54	0.71
100	14.58	2.31	1.07
150	17.50	2.78	1.28
200	15.40	2.44	1.13
250	18.89	3.00	1.38
300	19.94	3.17	1.46
450	26.34	4.18	1.93
600	30.62	4.86	2.24

Table A1. Air permeability under positive air pressure; test results

negative pressure differential Pa	Air flow through the specimen m ³ /h	Air flow per unit area of the specimen m ³ /h.m ²	Air flow per metre of opening joint m ³ /h.m
50	11.24	1.78	0.82
100	17.95	2.85	1.31
150	23.32	3.70	1.70
200	23.03	3.66	1.68
250	30.27	4.80	2.21
300	35.07	5.57	2.56
450	46.98	7.46	3.43
600	51.60	8.19	3.77

Table A2. Air permeability under negative air pressure; test results

Pressure differential Pa	Average air flow per unit area of the specimen m ³ /h.m ²	Average air flow per metre of opening joint m ³ /h.m
50	1.66	0.77
100	2.58	1.19
150	3.24	1.49
200	3.05	1.41
250	3.90	1.97
300	4.37	2.01
450	5.82	2.68
600	6.53	2.81

Table A3. Averages of air permeabilities under positive and negative air pressures; test results



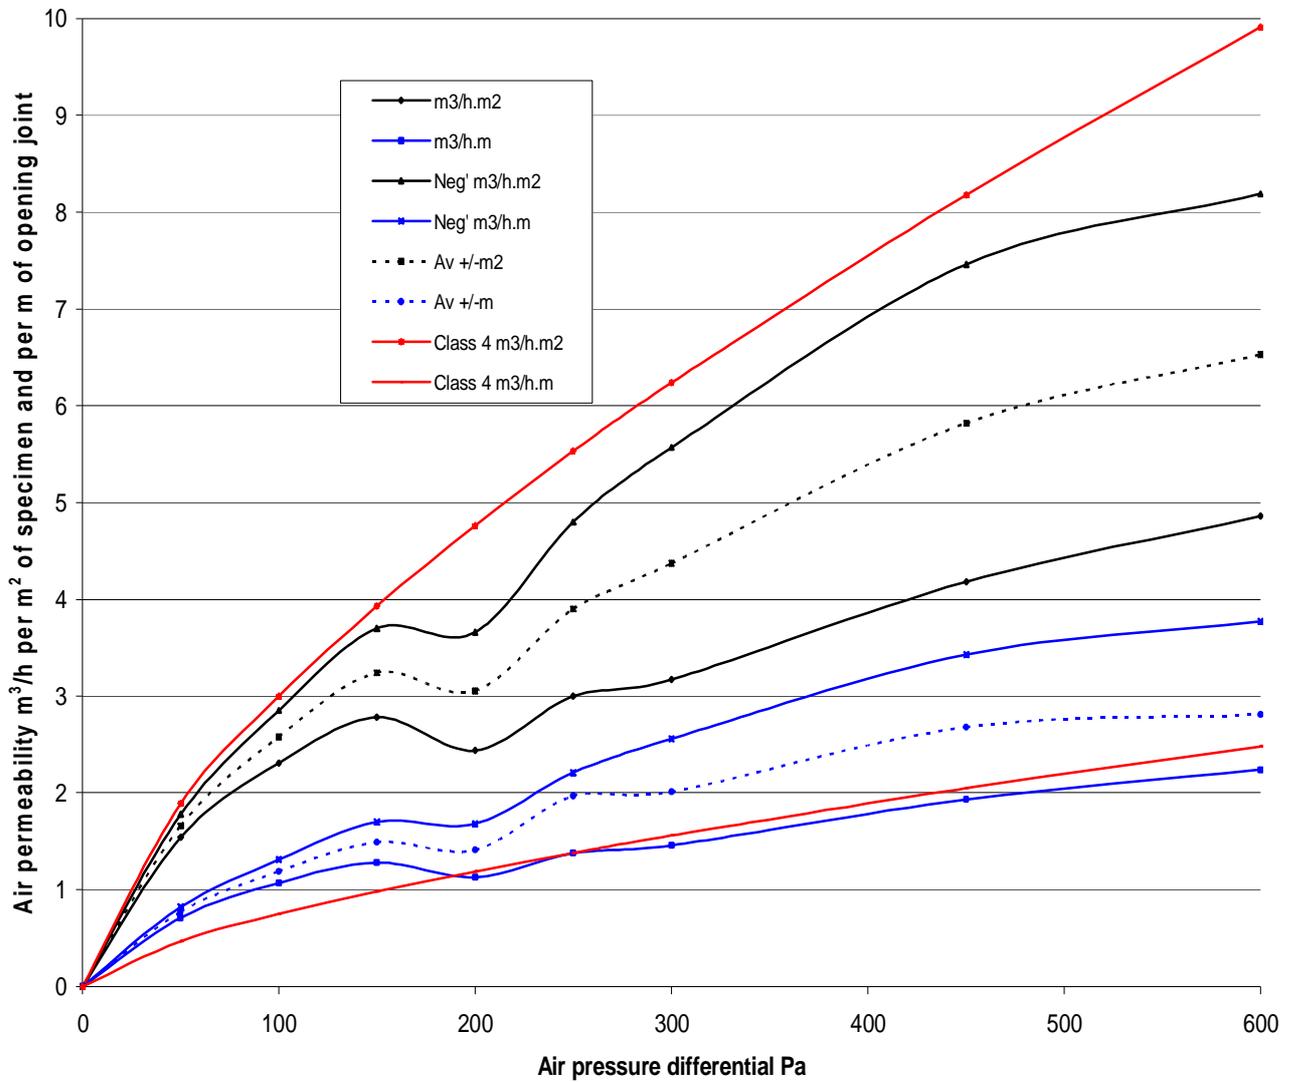


Figure A1. Air permeability under positive and negative air pressure; test results

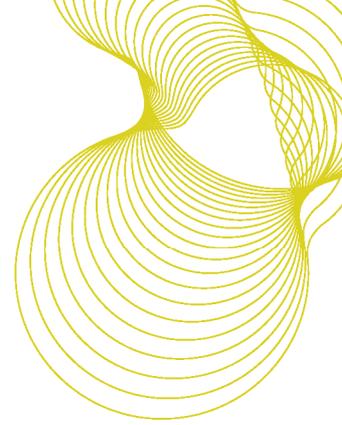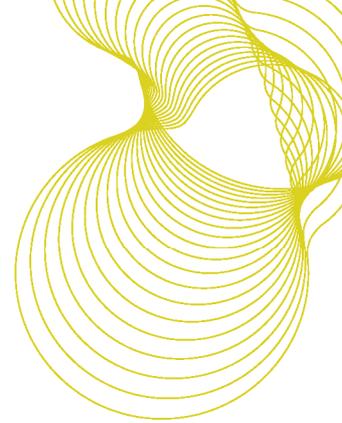

Watertightness test

Pressure differential Pa	Duration	Water leaks
	Minutes	
0	15	Nil
50	5	Nil
100	5	Nil
150	5	Nil
200	5	Nil
250	5	Nil
300	5	Nil
450	5	Nil
600	5	Nil

Test laboratory conditions: Air pressure 1000 mb. Relative humidity 62.9% at 21.6°C
Air temperature 21.6°C. Test chamber air temperature 21.4°C. Water temperature 21.5°C


Table A4. Watertightness test results

Resistance to wind load – Deflection test at ± 2400 Pa

Position deflection measured	Positive pressure P1 to +2400 Pa		Negative pressure P1 to - 2400 Pa	
	Deflection		Deflection	
	mm	defl./span	mm	defl./span
Mid height of right hand side stile on middle leaf	8.90	1/222	9.06	1/219

Note: The deflection at the mid-point of a member is measured relative to its ends, e.g. with reference to Figure 1: Deflection at the mid-point = deflection at the mid-point – average of deflections at the two ends of the same member.

Table A5. Deflections measured on right hand stile on middle leaf in the resistance to wind load test at ±2400Pa.

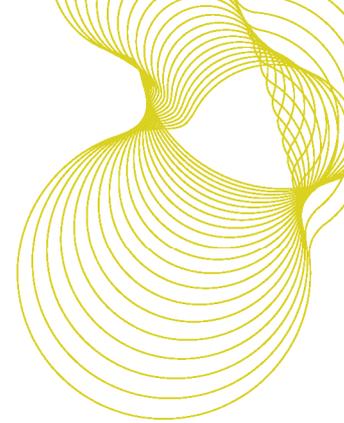

Resistance to wind load – Repeated pressure test including the second air permeability test

Repeated pressure	Damage or functional defects
50 cycles to P2 at ± 1200 Pa	None

Table A6. Damage or functional defects after repeated pressures to P2 at ± 1200 Pa

Second air permeability test under positive air pressures (part of resistance to wind load test)


Positive pressure differential Pa	Air flow through the specimen m ³ /h	Air flow through the specimen as measured previously m ³ /h	Comparison to the air permeability measured previously (see Table A1)
50	10.57	9.73	After the test pressures P1 and P2 were applied the amounts of air flowing through the test specimen were not significantly different to those measured previously
100	14.85	14.58	
150	17.79	17.50	
200	15.56	15.40	
250	19.29	18.89	
300	20.13	19.94	
450	27.40	26.34	
600	32.85	30.62	

Table A7. Second air permeability test results under positive air pressures

Second air permeability test under negative air pressures (part of resistance to wind load test)

Negative pressure differential Pa	Air flow through the specimen m ³ /h	Air flow through the specimen as measured previously m ³ /h	Comparison to the air permeability measured previously (see Table A2)
50	11.65	11.24	After the test pressures P1 and P2 were applied the amounts of air flowing through the test specimen were not significantly different to those measured previously
100	18.96	17.95	
150	24.32	23.32	
200	23.86	23.03	
250	30.97	30.27	
300	35.99	35.07	
450	48.65	46.98	
600	53.11	51.60	

Table A8. Second air permeability test results under negative air pressures

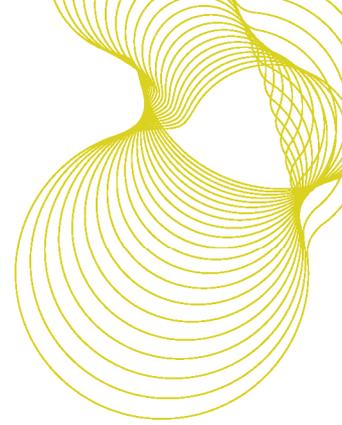

Resistance to wind load - Safety test

Safety test	Condition after test
One pressure pulse to pressure: P3 at – then + 3600 Pa	No parts became detached and the test specimen remained closed

Table A9. Condition of the door after the safety test to P3 at ±3600 Pa

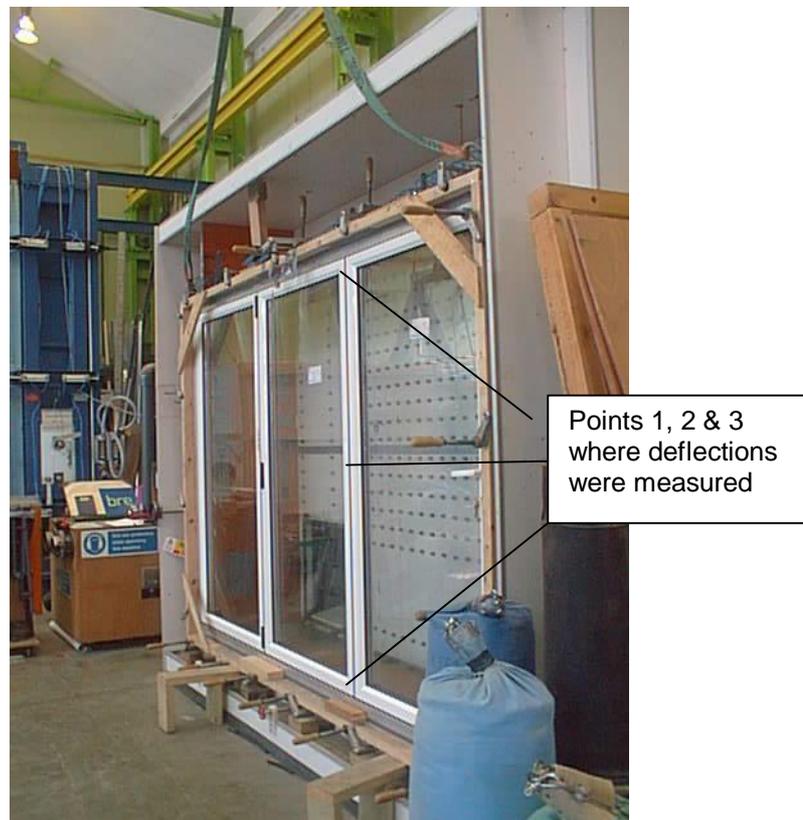


Figure 1. The specimen in the BRE Test rig 'G'

=====REPORT ENDS=====